




# Disassembling JBL Charge Casing

If one is to repair the JBL Charge, first they must get into the device. Follow this guide to open the JBL Charge.

Written By: Joe Durand

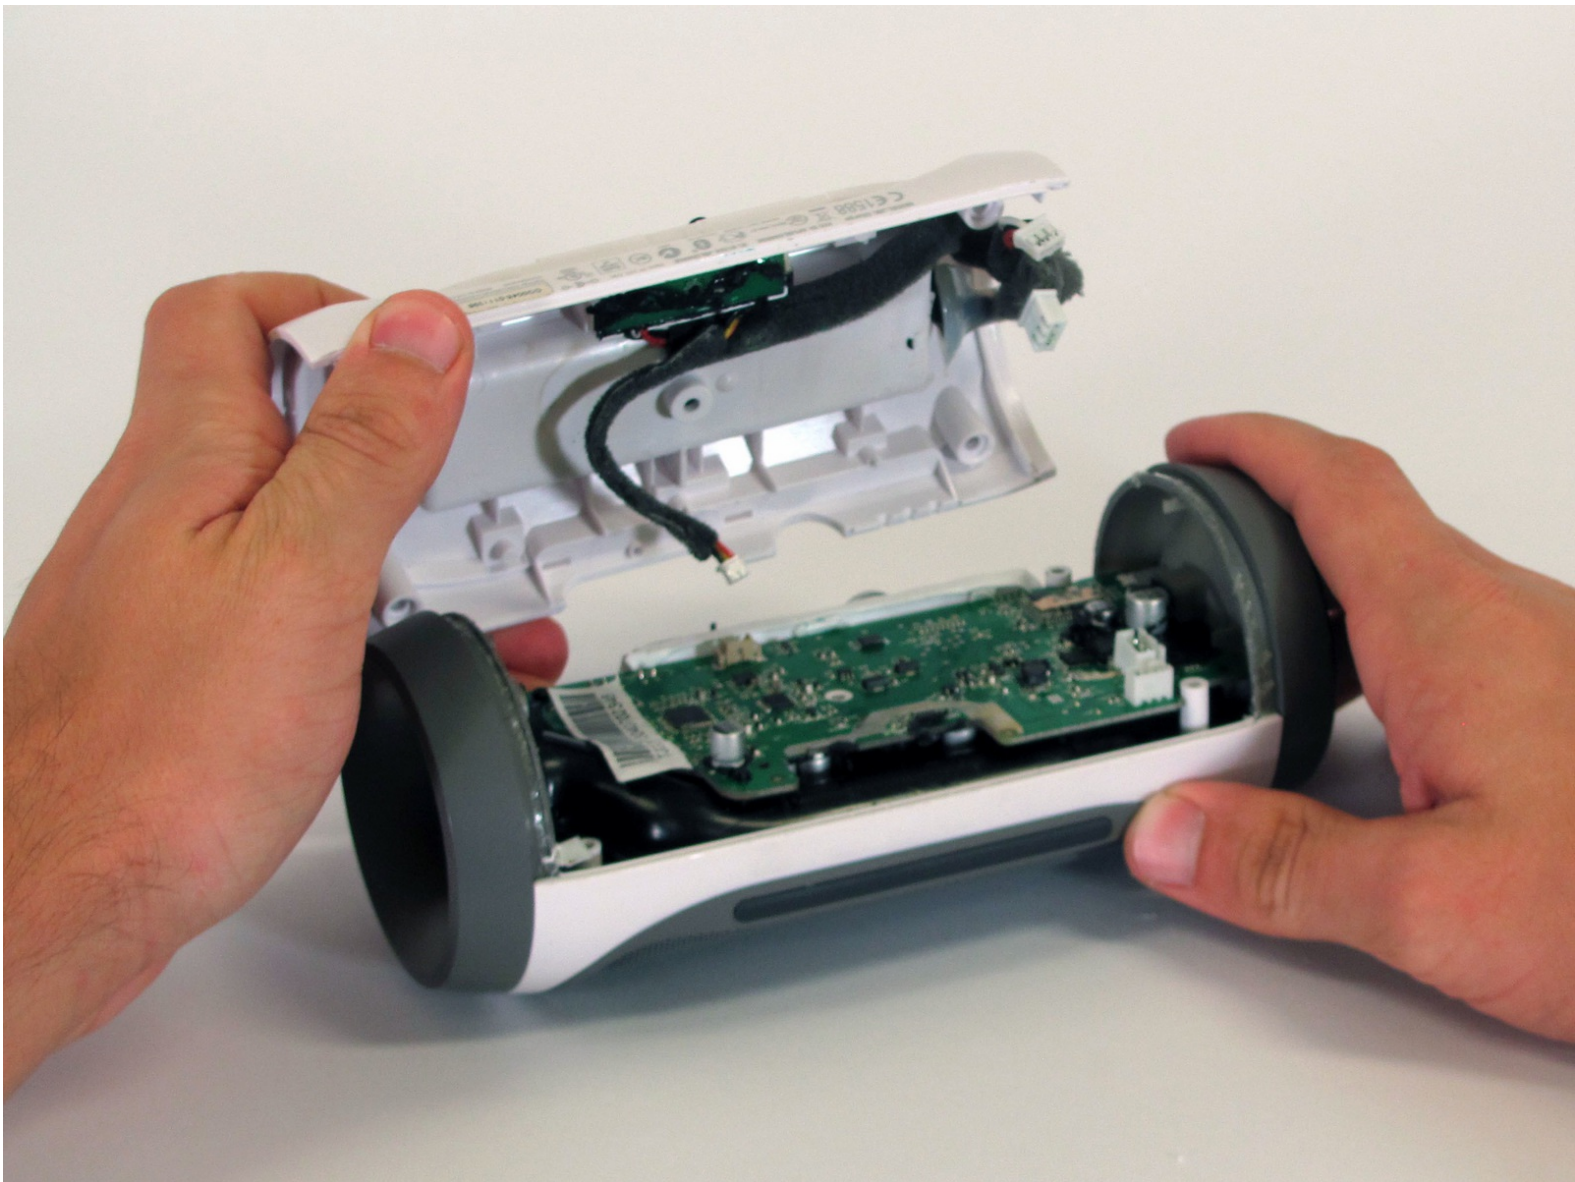

## INTRODUCTION

It's hard to repair anything without opening it up first.

---



### TOOLS:


- [Metal Spudger](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Disassembling JBL Charge Casing



- Make sure the device is powered off before you begin.
- Use a Jimmy or metal spudger on each corner to separate the trim from the device.



## Step 2

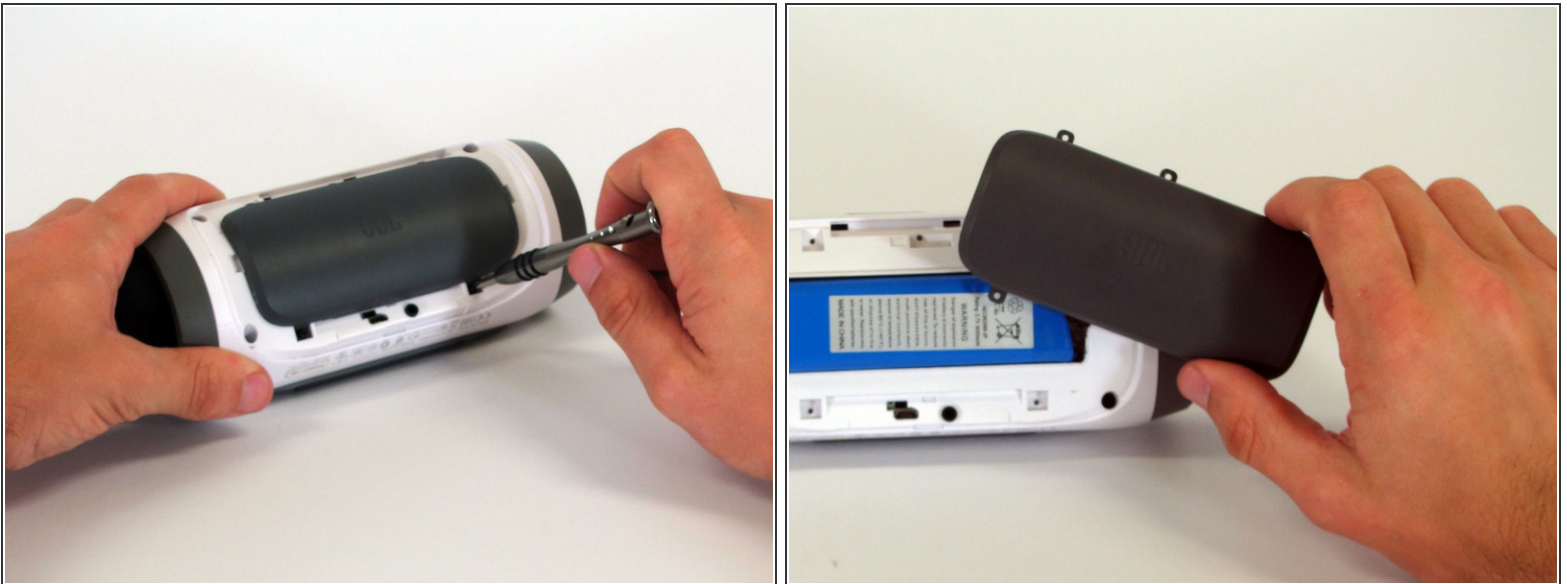

- Use the PH1 screwdriver to remove the five 6 mm Phillips screws from the battery cover.
- Remove the battery cover and set it aside.




### Step 3

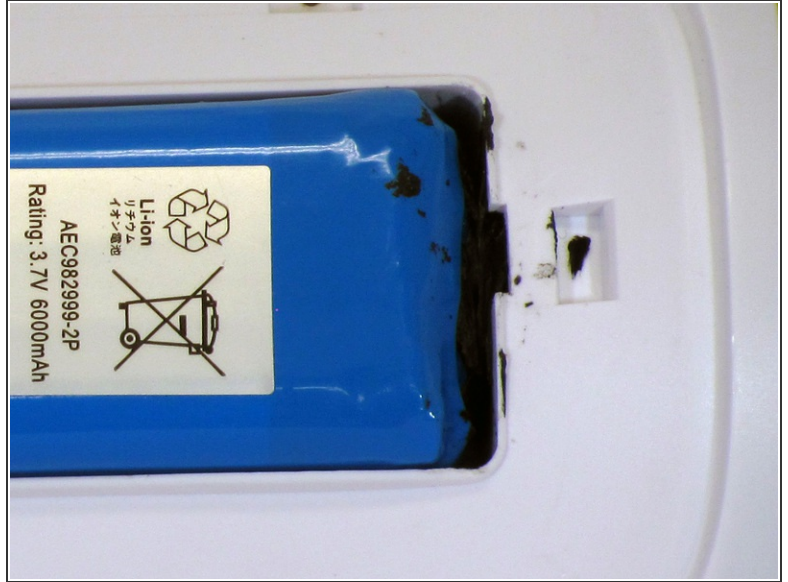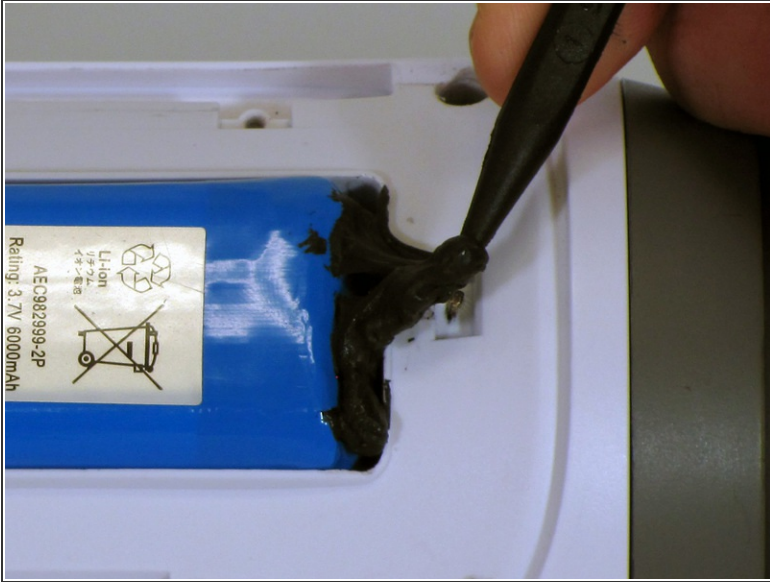

- Use a spudger to remove most of the liquid electrical tape from the battery and battery compartment.
- ⚠ Be careful to not puncture the battery or damage the battery wire under the liquid electrical tape.


## Step 4

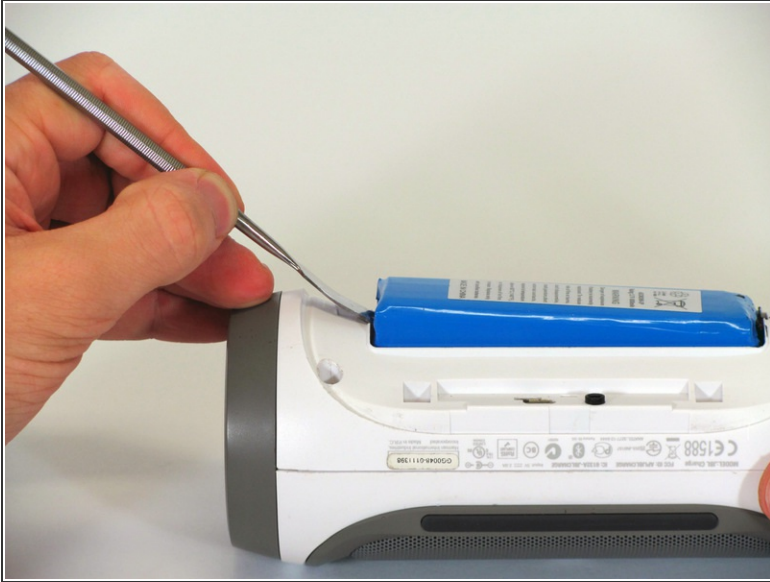

- Use a metal spudger to pry the edge of the battery out of the device.
- Lift the battery just enough to remove the 16mm PH2 screw underneath it.

⚠ Lifting the battery too far will cause damage to the battery wire.

## Step 5

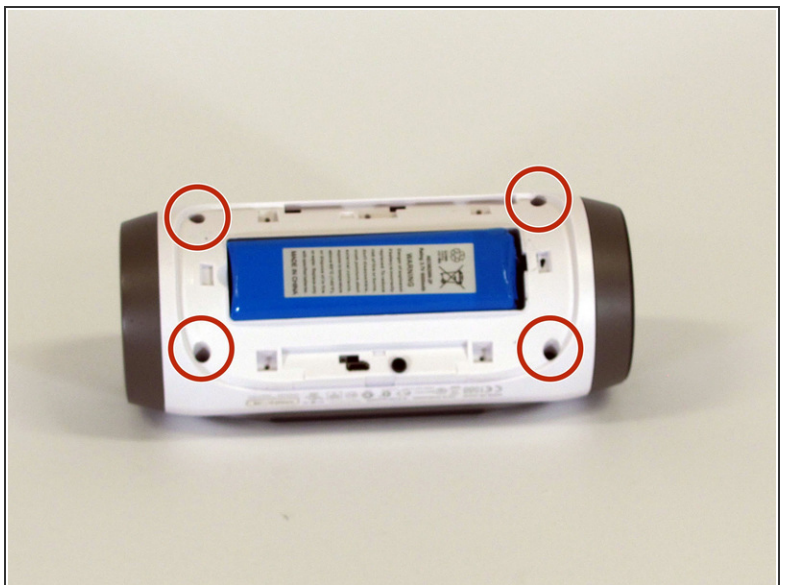

- Remove the remaining four 16mm Phillips screws from the white plastic casing with the PH2 screwdriver.



## Step 6



- Start in a corner, where the casing and the side meet. Use a pointed metal spudger to pry apart the glue holding these seams together.
- Slide the metal spudger along these seams to separate the back casing from the rest of the speaker.



## Step 7

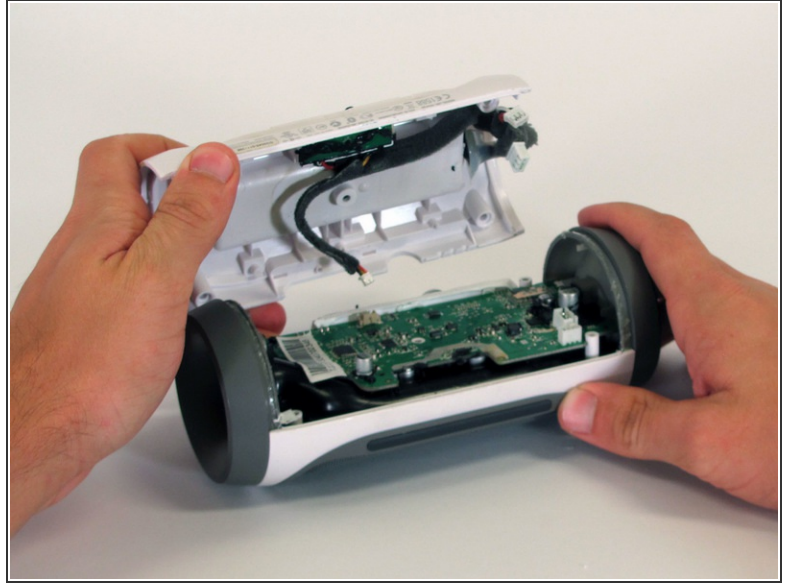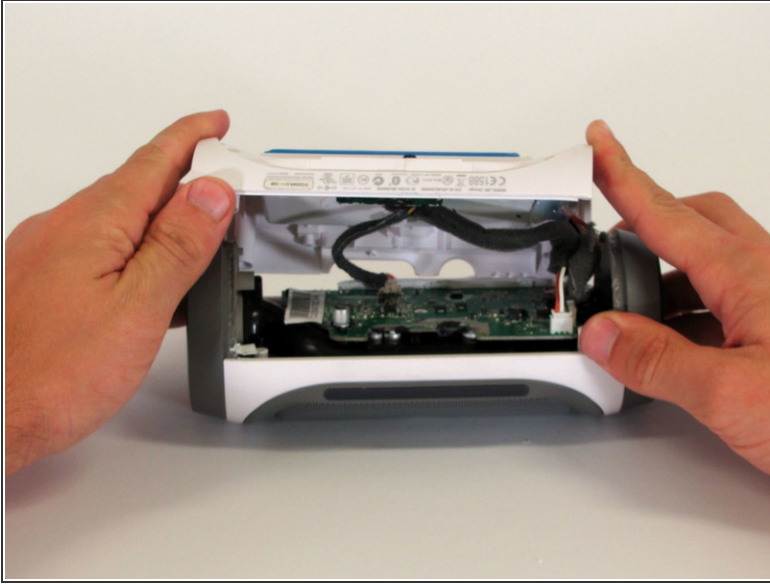

- Once the device is open, disconnect the three white connectors from the motherboard.
- Separate the two pieces of the casing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 12:39:26 AM.